


hameco

HV-46

Auto Framing 4K EPTZ Camera

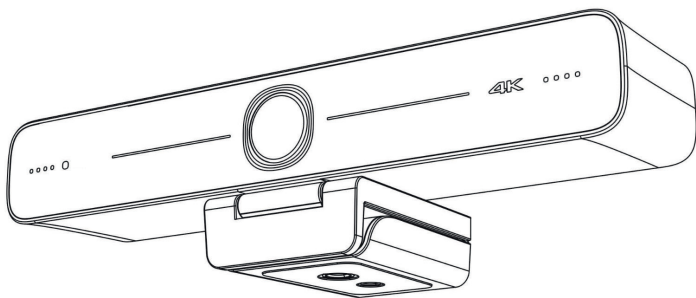

User Manual

ATTENTION

This manual introduces functions, installations and operations for this camera in details. Please read this manual carefully before installation and use.

1. Cautions

1.1 Avoid damage to product caused by heavy pressure, strong vibration or immersion during transportation, storage and installation.

1.2 Housing of this product is made of organic materials. Do not expose it to any liquid, gas or solids which may corrode the shell.

1.3 Do not expose the product to rain or moisture.

1.4 To prevent the risk of electric shock, do not open the case. Installation and maintenance should only be carried out by qualified technicians.

1.5 Do not use the product beyond the specified temperature, humidity or power supply specifications.

1.6 Wipe it with a soft, dry cloth when cleaning the camera lens. Wipe it gently with a mild detergent if needed. Do not use strong or corrosive detergents to avoid scratching the lens and affecting the image.

1.7 This product contains no parts which can be maintained by users themselves. Any damage caused by dismantling the product by user without permission is not covered by warranty.

2. Electrical Safety

Installation and use of this product must strictly comply with local electrical safety standards.

3. Install

3.1 Do not rotate the camera head violently, otherwise it may cause mechanical failure;

3.2 This product should be placed on a stable desktop or other horizontal surface. Do not install the product obliquely, otherwise it may display inclined image.

3.3 Ensure there are no obstacles within rotation range of the holder.

3.4 Do not power on before completely installation.

4. Magnetic Interference

Electromagnetic fields at specific frequencies may affect the video image. This product is Class A. It may cause radio interference in household application. Appropriate measure is required.

Attentions.....	2
1.Camera Installation.....	4
1.1 Camera Interfaces.....	4
1.2 Camera Operation.....	4
2. Product Overview.....	4
2.1 Product Introduction.....	4
2.1.1 Model.....	4
2.1.2 Dimension.....	5
2.1.3 Accessory.....	5
2.2 Main Features.....	6
2.3 Technical Parameter.....	7
2.4 Interfaces Instruction.....	9
2.4.1 External Interfaces.....	9
3. Application Instruction.....	10
3.1 Remote Control.....	10
3.1.1 Key Introduction.....	10
3.1.2 Applications.....	11
3.2 Menu Introduction.....	13
3.2.1 Main Menu.....	13
4. Maintenance and Troubleshooting.....	18
4.1 Camera Maintenance.....	18
4.2 Troubleshooting.....	18
5. Copyright Statement.....	19
6. Product disposal.....	19

1. Camera Installation

1.1 Camera Interfaces




Figure 1.1 Product Interfaces

- 1. Camera lens
- 2. Indicator light
- 3. Built-in MIC

- 4. Tripod fixing hole
- 5. Positioning hole
- 6. Bracket

- 7. USB 3.0 interface

1.2 Camera Operation

- 1) Product Installation: Fix the device on LCD screen, top of computer; directly put it on desk or on tripod mounting.
- 2) Connect camera via USB cable to computer, video conference terminal or other USB input device, log in the video conference software and select a video device to have image output.

2. Product Overview

2.1 Product Introduction

2.1.1 Model

- Model No. HV-46 1 83°Fixed Lens
- 2 100°Fixed Lens

2.1.2 Dimension

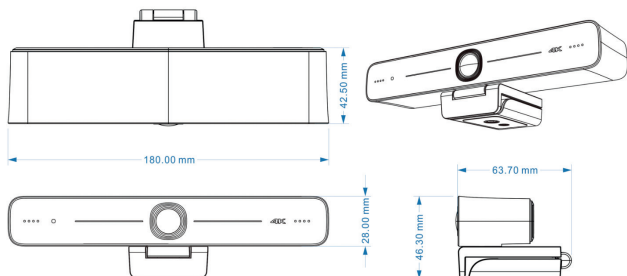


Figure 2.2 Product Dimension

2.1.3 Accessories

Please check below standard and optional accessories when unpacking the box.

Standard Accessory	IR Remote Control
	USB3.0 Cable
	User Manual

2.2 Main Features

HV-46 is a 4K ultra-high-definition ePTZ camera with a new design. With AI intelligence, it can frame according to the number of people in the scene, and the characters are in the middle. It has perfect functions and superior performance, which employs advanced ISP processing algorithms so as to provide vivid images with evenly clear brightness, strong color layering, high resolution, and fantastic color rendition. Easy and convenient to install and maintain, stable and reliable.

- **Ultra HD 4K Resolution:** 1/2.8 inch high quality CMOS sensor. Resolution is up to 4K with frame rate up to 30fps (MJPG) or 30fps (H.264); compatible with 1080P and 720P.
- **ePTZ:** ePTZ and 10X digital Zoom;
- **Built-in MIC:** Built-in two omni-directional MIC pickups; with unique noise suppression algorithm, effective pickup distance up to 6 meters.
- **Auto Framing:** Employing superior face detection algorithm to intelligently and automatically frames according to the number of people in the scene, and the characters are in the middle.
- **Wide FOV:** 83°/100° wide angle and small distortion lens options.
- **Video output interface:** Video output interface USB 3.0;
- **Multiple Audio/Video Compression Standard:** Supports H.264, MJPG, YUY2, NV12 video compression, to make video play smoothly.
- **Low Noise and High SNR:** Super high SNR image is achieved with low noise CMOS. Even in the case of ultra-low illumination, the picture remains clean and clear.
- **Multiple Installations:** Standard equipped with mold clamp. Easy to install on any devices, such as LCD screen, laptop, table and tripod.
- **Easy to Use:** No need to download driver; USB 3.0 Plug and play;
- **Wide Applications:** Personal video conferencing, enterprise video conferencing, collaboration meeting, etc.

2.3 Technical Parameters

Model	HV-46
Camera Parameters	
Sensor	1/2.8 inch High Quality 4K CMOS Sensor
Effective Pixels	8.28MP 16:9
Video output interfaces	1 Channel USB 3.0 output, Type B, Support audio-in
Audio input	2*Built-in MIC pickup
Video Format	<p>MJPG 3840*2160@30 /2560*1440@30 /1920*1080@30 /1600*896@30 /1280*720@30 /1024*576@30 /960*540@30 /800*600@30 /800*448@30 /720*576@30 /720*480@30 /640*480@30 /640*360@30 /480*270@30 /352*288@30 /320*240@30</p> <p>H264 3840*2160@30 /2560*1440@30 /1920*1080@30 /1600*896@30 /1280*720@30 /1024*576@30 /960*540@30 /800*600@30 /800*448@30 /720*576@30 /720*480@30 /640*480@30 /640*360@30 /480*270@30 /352*288@30 /320*240@30</p> <p>YUY2 1920*1080@30 /1280*720@30 /1024*576@30 /800*600@30 /800*448@30 /640*480@30 /640*360@30 /480*270@30 /320*180@30</p> <p>NV12 1920*1080@30 /1280*720@30 /1024*576@30 /800*600@30 /800*448@30 /640*480@30 /640*360@30 /480*270@30 /320*180@30</p>
View Angle	91° (D) / 83°(H) / 54°(V)
Focus	f=3.24mm
Aperture	F2.1
Digital Zoom	10X
Minimum Illumination	0.1Lux(F1.8, AGC ON)
Focus	Manual

White Balance	Auto / Manual	
Exposure	Auto / Manual	
Backlight Contrast	On/Off	
SNR	≥50dB	
USB Feature		
Operation Systems	Windows 7(1080P or lower), Windows 8.1, Windows 10 ; macOS™ 10.10 or higher; Linux (UVC support); Android	
Video Compression format	YUY2, NV12, MJPG, H.264	
USB Audio	Support	
USB Communication Protocol	UVC, UAC	
PTZ Control	Support EPTZ	
Hardware Requirement	2.4 GHz Intel® Core 2 Duo processor or higher, 2GB memory or higher, USB 3.0 port(USB 3.0 for 4K)	
Other Parameters		
Input Voltage/Current	Voltage	5V
	Current	1A(max)
Power Consumption	5W(max)	
Stored Temperature	-10 C° ~ +60 C°	
Stored Humidity	20% ~ 90%	
Working Temperature	-10 C° ~ +50 C°	
Working Humidity	20% ~ 80%	
Dimension(W*H*D)	180mm×42.5mm×46.3mm	
Weight	Around 0.23kg	

Application	Indoor
Accessory	USB 3.0 cable, Remote Controller, User Manual

2.4 Interfaces Instruction

2.4.1 External Interface

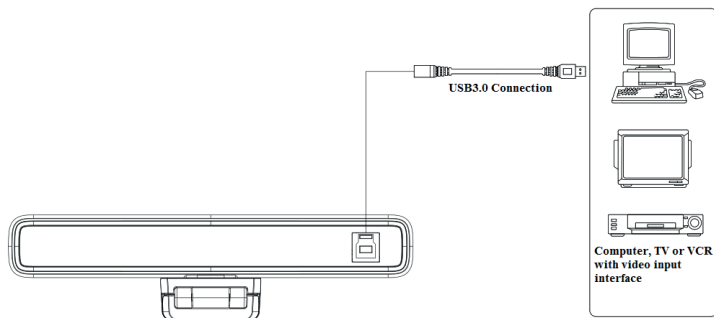


Figure 2.4 Wiring Diagram

3. Application Instruction

3.1 Remote Controller



3.1.1 Keys Instruction

1. Indicator light

2. Standby Key

Press button once to enter the standby mode, and press it again to restart the output video.

3. Menu

Enter/exit the OSD menu or return to the previous menu.

4. ePTZ



keys control the electronic pan/tilt to move up and down, left and right, and the menu can be adjusted up and down, left and right.

(OK) : Press (OK) to return to the HOME position or enter the next menu.

5. Number Keys

Set or call 1-3 presets

Note: Short press 1 second to call out the presets

Press and hold 3 seconds to set the presets

Press and hold 5 seconds to clear the presets


6. Focus Control Key (this Camera not support)

Auto Focus: Enter into auto focus mode.

Manual Focus: The camera focus mode is manual

Switch the camera focus mode to manual focus by pressing [focus +] or [focus -] to adjust.

7. Auto Framing

Auto Framing Press  to turn on/off the Auto Framing Function

3.1.2 Applications

Pairing: When the remote control is powered on, press the “Zoom In” + “Zoom Out” button simultaneously within 30cm of the camera, release the button after the LED flashes for 3 seconds, enter the pairing mode, the pairing is successful, the LED lights up for 2 seconds and then goes out. At this time, preset position setting/calling, zooming, electronic PTZ control, Auto Framing on/off and other operations can be performed through the infrared remote control.

Key Instruction:



The button method mentioned in this manual refers to the two actions of pressing and releasing the buttons on the remote controller. For example, “pressing the [OK] key” refers to the action of pressing the [OK] key and then releasing it. If you need to press the key for a long time, it will be specially explained in the manual.

- | |
|--|
| 1. Red light keep on: Send command |
| 2. Light off: Not sending command |
| 3. Flashing light: slow: not pairing fast: pairing |

1. Indicator Light




2. Stand-by and menu setting

	Turn On/Off image
	Call OSD menu




3. ePTZ

Move up ▲	Move down ▼
Move left ◀	Move right ▶
 : Back to home or confirm	
Long press the up, down, left, and right buttons, and it will continue to rotate from slow to fast until it reaches the end of the stroke; release it in the middle to stop the rotation.	



4. Set, call, clear, preset



Number keys: 1, 2, 3

1. Save the preset position: long press (within 3s-5s) one of the number keys 1 to 3 to preset a preset position corresponding to the number key.

2. Calling the preset position: directly press the number keys 1 to 3 to call the saved preset position.

3. Delete preset position: long press (5s) one of the number keys 1 to 3 to delete a preset position corresponding to the number key.



Note: If the number key is not preset, it is invalid

5. Zoom Control

 Zoom in

 Zoom Out

Long press keys to keep zoom in/out

Combined press  and  for 3 seconds and release button when LED flashing to enter pairing mode. When pairing is completed, the LED will be off after flashing 2 seconds



6. Auto Framing


Turn on/off auto framing function



3.2 Menu Introduction

3.2.1 Main Menu

Press **(MENU)** key under **MJPG, YUY2, NV12 or H264 compression encoding format output** to display the menu, using scroll arrow to point at or highlight the selected items.

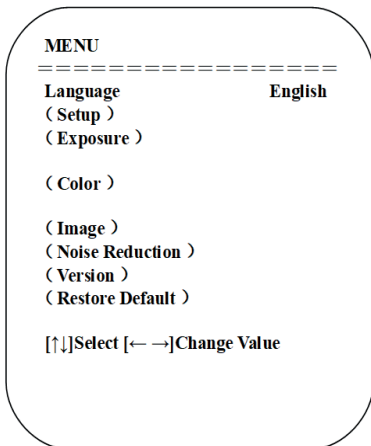

1) Language

1. Language Setting press (←→)key to select Language

2) System Setting

Move the pointer to the (Setup) in the Main Menu, click the **(HOME)** key and enter into the (System Setting) as shown below.


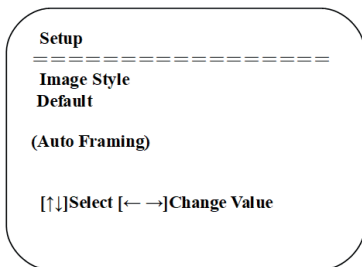


Image Style: default / standard / clear / bright / soft can be set
Intelligent zoom: on / off

3) Exposure Setting

Move the pointer to EXPOSURE in the Main Menu, click the **(HOME)** and enter the (EXPOSURE SET) as follows:



Mode: Auto, Manual, Shutter priority and Brightness priority.

EV: On/Off (only available in auto mode)

Compensation Level: -7~7 (only available in auto mode when EV is ON)

BLC: ON/OFF for options (only available in auto mode)

Anti-Flicker: OFF/50Hz/60Hz for options

(only available in Auto/Iris priority/Brightness priority modes)

Gain limit: 0~15

(only available in Auto/ Iris priority /Brightness priority mode)

WDR: Off, 1~8


ShutterPriority: 1/30, 1/50, 1/60, 1/90, 1/100, 1/120, 1/180, 1/250, 1/350, 1/500, 1/1000, 1/2000, 1/3000, 1/4000, 1/6000, 1/10000

(only available in Manual and Shutter priority mode)

Brightness: 0~23 (only available in Brightness priority mode)

4) Color

Move the pointer to the (COLOR) in the Main Menu, click the **(HOME)** and enter the (COLOR sub menu) as follow,

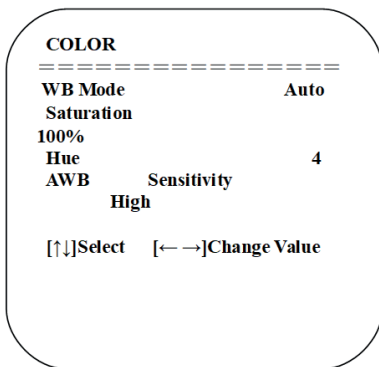

WB Mode: Auto, Manual, One Push, Specified color temperature


Saturation: 60%, 70%, 80%, 90%, 100%, 110%, 120%, 130%, 140%, 150%, 160%, 170%, 180%, 190%, 200%

AWB Sensitivity: high/middle/low (only available in automatic mode)

Chroma: 0~8

5) Image

Move the pointer to the (IMAGE) in the Menu, click the **(HOME)** and enter into the (IMAGE sub menu) as follow.

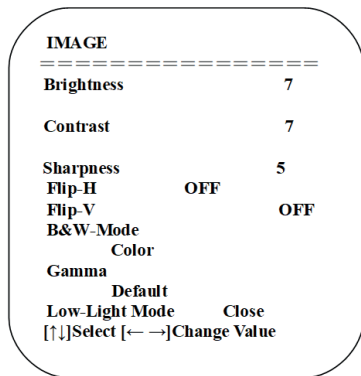

Brightness: 0~14

Contrast: 0~14

Sharpness: 0~15

Flip-H: On/Off

Flip-V: On/Off


B&W Mode: color, black/white

Gamma: Default/0.34/0.39/0.47/0.5

Minimum Illumination: On/Off

6) Noise Reduction

Move the pointer to the (NOISE REDUCTION) in the Menu, click the **(HOME)** and enter the (NOISE REDUCTION) as follow,

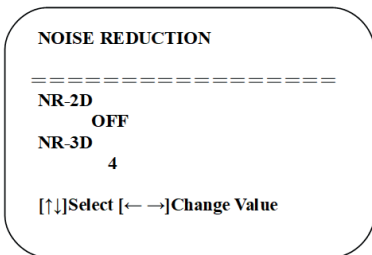

2D Noise Reduction:


Auto, close, 1~7

3D Noise Reduction:

Close, 1~8


7) Version

Move the pointer to the (VERSION) in the Main Menu, click the **(HOME)** and enter the (VERSION) as follow

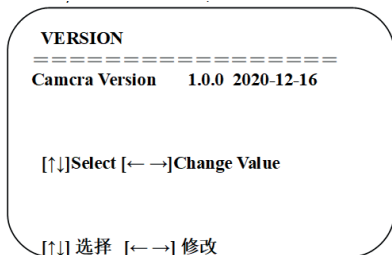

8) Restore Default

Move the pointer to the (RESTORE DEFAULT) in the Main Menu, click the **(HOME)** and enter the (RESTORE DEFAULT) as follow

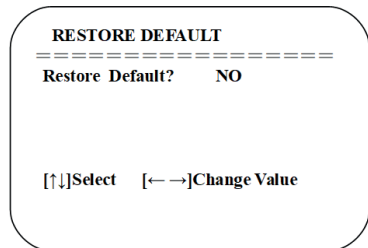

Restore default:

YES/NO. Color style and video format cannot be restored to factory default

Note: If the address of former remoter is not 1 but another one from 2, 3, 4, the corresponding camera address will restore to 1 when all parameters or system parameters are restored. User should change the remoter address to be 1 (press No.1 according to the camera so to get normal operation)

4. Maintenance and Troubleshooting

4.1 Camera Maintenance

- 1) Please power off the camera and disconnect the power adapter and socket, if it's not used for a long run.
- 2) Use soft cloth or tissue to clean the camera cover.
- 3) Wipe it with a soft, dry cloth when cleaning the camera lens. Wipe it gently with a mild detergent if needed. Do not use strong or corrosive detergents to avoid scratching the lens and affecting the video quality.

4.2 Troubleshooting

1) No video output

- a. Check whether USB cable connected well and power indicator light is ON.
- b. Whether the machine could do self-check after restarted.
- c. Restart the computer to check whether it is normal
- d. Check whether the video output cable or video display is normal
- f. Check whether the camera is well recognized by PC

2) No image sometimes

- a. Check the USB cable quality and whether connected well.

5. Copyright Statement

All the contents in this manual and its copyright are owned by the company. No one is allowed to imitate, copy, or translate this manual without the company's permission. This manual contains no guarantee, standpoint expression or other implies in any form. Product specification and information in this manual is for reference only and subject to change without notice.

All rights reserved. No reproducing is allowed without acknowledgement.

6. Product disposal

Safety

For your own safety, this product should only be used with CE and RoHS approved equipment. Using this headset with non-approved equipment would void the warranty of this product.

Disposal of your product

Municipal waste stream. Old appliances must be collected separately in order to optimise the recovery and recycling of the materials to reduce the impact on human health and the environment. The crossed out "wheeled bin" symbol on the product reminds you of your obligation that when you dispose of the appliance, it must be separately collected. Consumers should contact their local authority or retailer for information concerning the correct disposal of their old appliance.

Declaration of conformity:

This product is in conformity with the relevant EU harmonisation legislation.

