

hameco

HS-8605D-BT



User Manual

CONTENT

1.	Welcome	2
2.	HS-8605D-BT overview	2
2.1.	Headset.....	2
2.2.	Included accessories.....	3
3.	How to wear	3
3.1.	Right wearing style	3
3.2.	Adjust the headband	3
3.3.	Position the microphone.....	4
3.4.	Storing the microphone	4
4.	How to charge the battery.....	5
5.	How to connect.....	6
5.1.	Connect to PC (using BT 100U)	6
5.2.	Connect to mobile device (using bluetooth).....	6
6.	How to use.....	7
6.1.	Everyday use	8
6.2.	Multiple call handling.....	9
7.	Support.....	9
7.1.	FAQ.....	9
7.2.	How to care for your headset.....	9
8.	Technical specifications	10
9.	Product disposal	11

1. WELCOME


Thank you for using the HS-8605D-BT Headset. We hope you will enjoy it!

HS-8605D-BT HEADSET FEATURES

- Connects to PC via BT 100U Bluetooth adapter or USB cable
- Connects to mobile devices via Bluetooth
- Integrated busy light
- Rotate the microphone boom-arm back to vertical position when not on calls
- Superior music and voice capabilities
- Hi-Fi Sound

2. HS-8605D-BT OVERVIEW

2.1. HEADSET

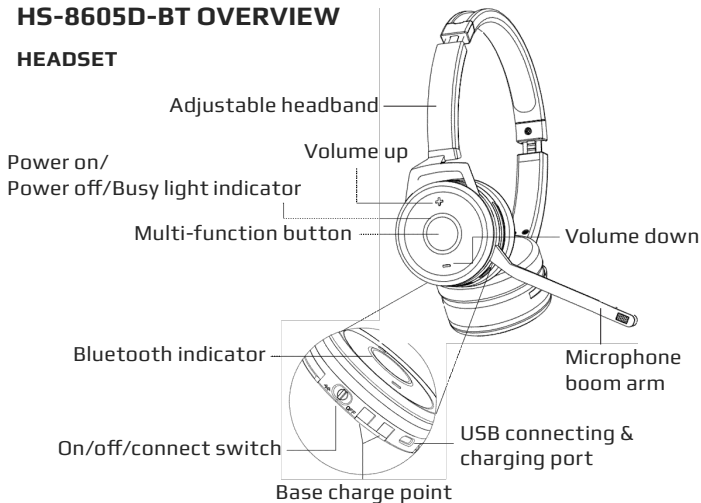


2.2. INCLUDED ACCESSORIES



Carry pouch



USB cable

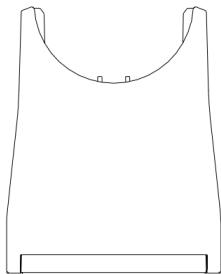

Charging base (optional)

3. HOW TO WEAR


3.1. RIGHT WEARING STYLE

The HS-8605D-BT can be worn only on the right.




3.2. ADJUST THE HEADBAND

Adjust the headband to find the most comfortable fit.




3.3. POSITION THE MICROPHONE

It is recommended to position the microphone close to your mouth. The microphone is bendable for personal preference.

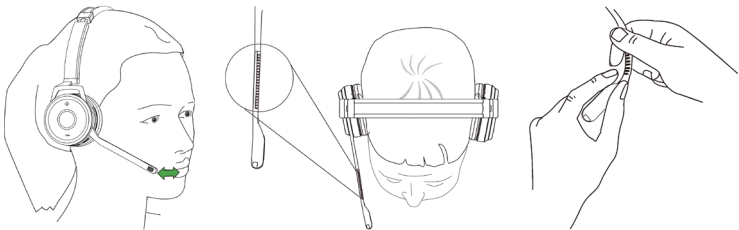

3.4. STORING THE MICROPHONE


When listening to music or outdoors, the microphone boom-arm can be rotated back into the vertical position near the headband.

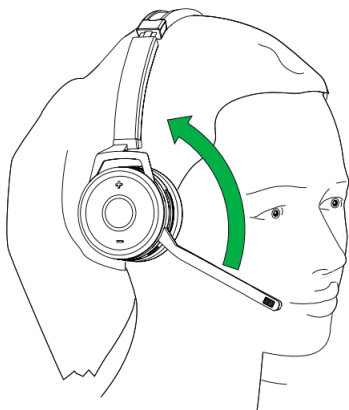

4. HOW TO CHARGE THE BATTERY

The headset battery will charge when connected to a PC using a USB cable, or when using any USB charger supplied with your mobile device.


It takes approx. 3 hours to charge the battery.

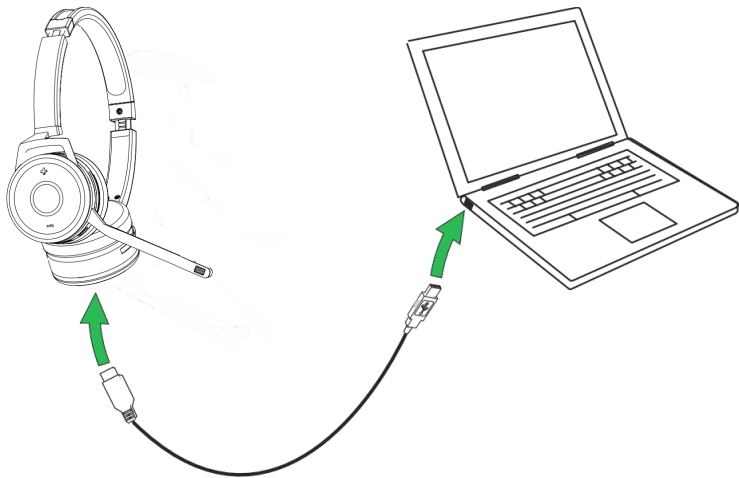

5. HOW TO CONNECT

5.1. CONNECT TO PC (USING BT 100U)

1. Ensure the headset is switched on.
2. Plug the BT 100U dongle into a USB port on your PC. The headset and BT 100U are already pre-connected.

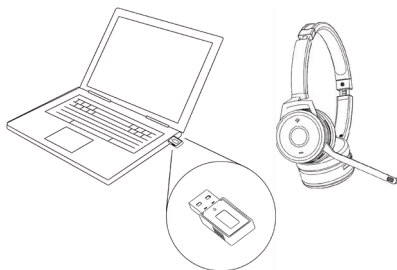


5.2. CONNECT TO MOBILE DEVICE (USING BLUETOOTH)







1. Wear the headset.
2. Hold (2 secs) the On/off/connect switch in the connect position until you hear the voice guided instructions. The Bluetooth indicator will flash blue.
3. Follow the voice guided instructions to connect.



6. HOW TO USE

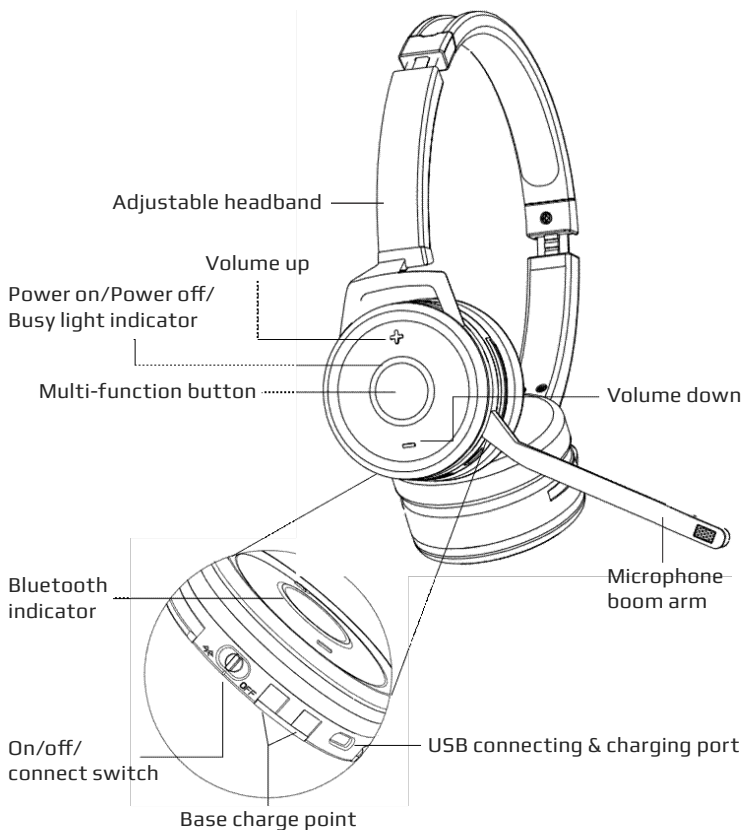


6.1. EVERYDAY USE

	Function	Action	LED status
	headset on	slide the on switch	green light flashes twice in succession
	headset off	slide the off switch	red light flashes twice in succession
	pairing	slide the pair button	blue light flashes
	pairing successful		blue light flashes twice in succession
	standby		blue light flashes once per 8 secs
	answer call	tap multi-function button	
	reject call	double tap multi-function button	
	enable/disable voice prompts	press and hold the multi-function button while turning on the headset	
	adjust volume	tap the volume up or volume down button	
	mute/unmute microphone	press and hold (2 secs) the volume down button	

6.2. MULTIPLE CALL HANDLING

The headset can accept and handle multiple calls at the same time.

	Function	Action
	end current call and answer incoming call	tap the multi-function button
	put current call on hold and answer incoming call	press and hold (2 secs) the multi-function button
	switch between held call and active call	press and hold (2 secs) the multi-function button
	reject incoming call, when on a call	double-tap the multi-function button

7. SUPPORT

7.1. FAQ

View the FAQs on www.hameco-headset.com

7.2. HOW TO CARE FOR YOUR HEADSET

Always store the headset with the power off and safely protected.

Avoid storage at extreme temperatures (above 55°C or below -10°). This can shorten battery life and may adversely affect the headset.

8. TECHNICAL SPECIFICATIONS

HS-8605D-BT HEADSET	
Bluetooth version	V4.2
Headset weight	158g
Headset dimensions	stereo headset: L 155mm×W 36mm×H 180mm
Wear style	headband
Talk time	8 hours
Charging time	3.5 hours
Charging base	optional
Microphones	noise cancelling microphone
Speaker size	40mm
Speaker frequency range	20Hz–20kHz
Cable length	connect to PC for charge: 1500mm
Operating temperature	-10°C to 55°C
Storage temperature	-20°C to 25°C

Bluetooth adapter (BT 100U)	
PC connection	USB 2.0
Bluetooth version	V4.2
Bluetooth range	up to 30m (100 feet), class 1
Bluetooth profiles	A2DP (V1.2), hands free profile (V1.6)
Simultaneous bluetooth connection	2
Bluetooth audio bandwidth	HD voice (wideband), A2DP
Visual indicators	Multicolor LED

9. PRODUCT DISPOSAL

Safety

For your own safety, this product should only be used with CE and RoHS approved equipment. Using this headset with non-approved equipment would void the warranty of this product.

Disposal of your product

Municipal waste stream. Old appliances must be collected separately in order to optimise the recovery and recycling of the materials to reduce the impact on human health and the environment. The crossed out "wheeled bin" symbol on the product reminds you of your obligation that when you dispose of the appliance, it must be separately collected. Consumers should contact their local authority or retailer for information concerning the correct disposal of their old appliance.

